

Multifunctional Coaxial Sound System **X6**

X6
COAXIAL



Multifunctional premium-class compact 2-way system. The coaxial configuration in combination with a carefully designed large-area horn ensures absolutely constant response even off the main axis. High-power Neodym drivers and long-excursion coils provide high efficiency and reduced distortion. Nine M10 threaded mounting points are available to mount MultiRigg hardware and other accessories for installation or mobile applications.


PRODUCT SPECIFICATIONS

Speaker Components	12" Nd (3,5" VC) / 1,4" Nd (3" VC)
Description	Multifunctional Coaxial Sound System
Power AES / Peak	500 W / 1500 W
Impedance nominal	8 Ω
SPL 1 W / Peak @ 1 m	99 dB / 131 dB
Usable Range	55 Hz - 18 kHz (-6 dB)
Tuning Frequency excursion minimum	65 Hz
X - Overpoint acoustical	1 kHz
Coverage horizontal / vertical	80° x 60° - rotatable
Connectors	2 x Speakon NL4MP in/out Coding: 1 +/- HiMid, 2 +/- loop thru
Handles	2 x
Rigging / Fittings	9 x M10 To be used with MultiRigg 35 mm pole mount
Weight	18,5 kg
Size height x width x depth	50,0 x 36,0 x 33,0 cm
Order No.	01095



DIMENSIONS

4 x M10 Twinpoints
for MultiRigg™

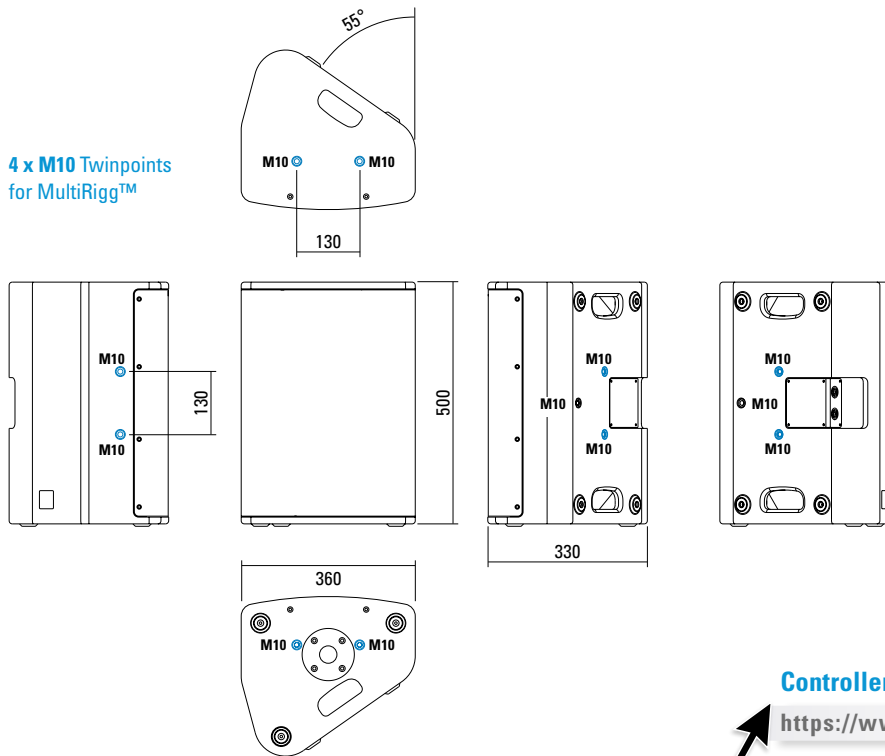


Controller Setups:


<https://www.seeburg.net/en/downloads>

MEASUREMENTS


2D Directivity Plot - horizontal

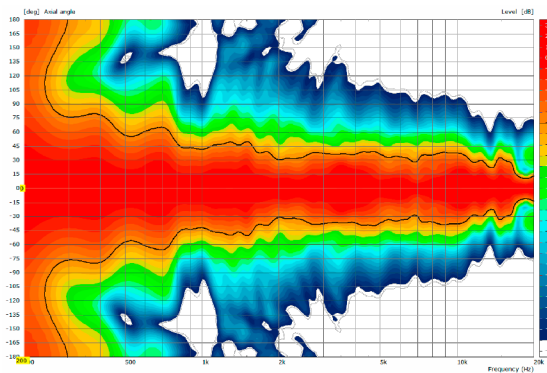


Sensitivity 1 W @ 1 m + Impedance

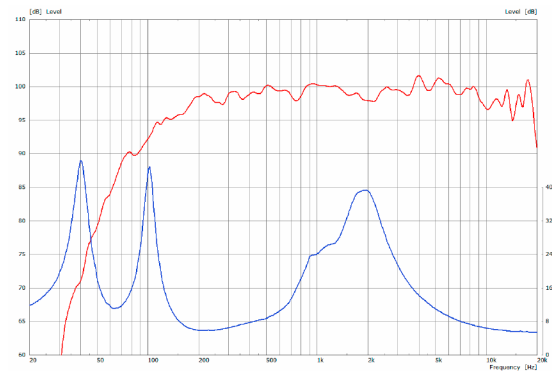


2D Directivity Plot - vertical

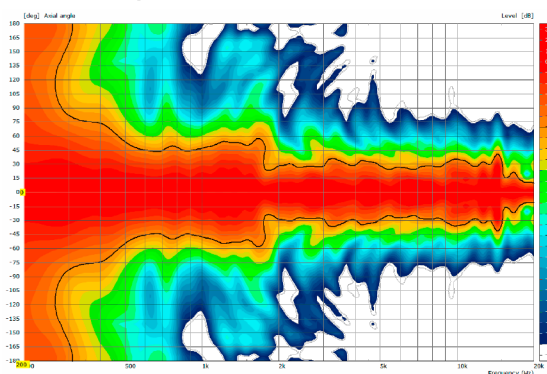

Frequency Response with Presets

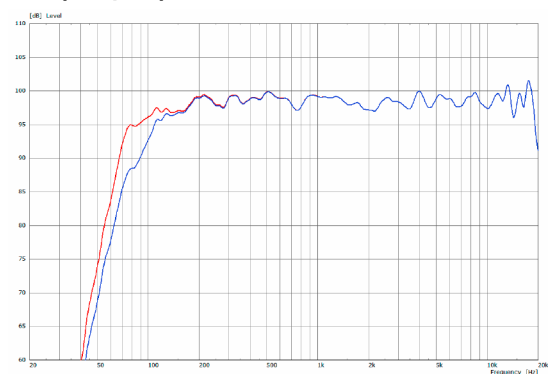

Flying-Bracket



for X 6,
horizontal alignment,
incl. (4 x M10 x 20 socket head
screws, 4 x M10 washers,
4 x rubber washers)

Order No. **01201/X6/set**

MultiRigg™



for flown and ground stacked
applications, (incl. 2 x knurled screws
M10 x 20 mm, 1 x handle screw
M8 x 55 mm), max. load 50 kg

Order No. **01360**

MultiRigg™ Light



for fixed installations,
(incl. 2 x socket head screws M10 x
20 mm), max. load 50 kg

Order No. **01362**

MultiRigg™ Basic



(incl. load adapter M10,
2 x knurled screws M10 x 20 mm),
max. load: 50 kg

Order No. **01364**

MultiTilt™



Tilt adapter with adjustable tilt
from 0° to 37,5° (2,5° steps),
integr. pole mount adapter with clam-
ping device, (incl. 2 x knurled screws
M10 x 20 mm), max. load 50 kg

Order No. **01370**

Knurled Screw



M10 x 20 mm

Order No. **73750/w** (RAL 9010)

Order No. **73750**

Knurled Head Nut



reduction screw for fastening
M10 Pole Mount Adapter (08126)

Order No. **73755**

Pole Mount Adapter



35 mm ø → M10 x 16 mm,
M8 x 20 star knob screw

Order No. **08126**

35 mm ø → M10 x 16 mm

Order No. **08126/II**

Steel Safety



6 mm x 600 mm, black,
quick connector undetachably,
max. load 22 kg (BGI 810-3)

Order No. **01376/6**

TV Spigot



M10 internal thread,
28 mm Ø

Order No. **08128**

Ring Screw



M10– DIN 580

Order No. **73700** (zincd)

Order No. **73700/sw** (black zincd)

Quick Trigger Clamp



max. load 100 kg

Order No. **01223/100 kg**

Quick Trigger Clamp - small



M10, max. load 20 kg

Order No. **01223/20 kg**



MultiRigg™ Light



MultiRigg™

ACCESSORIES X 6

Adapter



for X 4, X 6, X 8
for mounting with wall mount (03034),
incl. 2 x socket head screws
M10 x 20 mm

Order No. **01198/w** (RAL 9010)
Order No. **01198**

Wall Mount



2 x M6 fixing holes (d=73 mm),
1 x M10 fixing hole (center),
max. load 25 kg

Order No. **03034/w** (RAL 9010)
Order No. **03034**

Wall Mount



bar: 269 mm,
(incl. socket head screw M10 x 70 mm,
M10 hex lock nut and flat washer),
max. load 40 kg

Order No. **08130/F/269/w** (RAL 9010)
Order No. **08130/F/269**

Wall Mount



with tilt unit, max. load 40 kg
Order No. **08130**

Cover



for X 6,
padded
Order No. **01225/X6**

Rain Cover




for X 6,
with zipper
Order No. **01225/X6/outdoor**

Flight Case



for 2 pcs. X 6 and 2 pcs. MultiRigg,
partition walls, heavy duty, 9 mm
birch multiplex, PVC coated black,
6 x recessed sprung handles,
2 x butterfly catches, 4 x 100 mm blue
wheels (2 pcs. with brake), interior
lined with felt
Size (H x W x D): 68,6 x 61,5 x 65,5 cm
Order No. **16565**



Rain Cover