



The F series speakers are suitable for all applications where highly precise and broadband sound transmission down to low frequencies is required. This makes perfect integration easy and opens up many application possibilities in the field of corporate events, trade fairs and product presentations, press conferences, in conference rooms and lecture halls, in theaters, concert halls and cinemas as well as in sports halls and fitness centers. If the speakers are supported by subwoofers, concert levels are also possible. The arrangement of the components ensures good focusing to optimize speech intelligibility. All models feature newly developed top-class components to achieve the best possible sound quality and defined dispersion characteristics.

PRODUCT SPECIFICATIONS


Speaker Components	2 x 5" Nd (1,5" VC) / 1" Nd (1" VC)
Description	Fullrange Speaker System
Power AES / Peak	300 W / 900 W
Impedance nominal	16 Ω
SPL 1 W / Peak @ 1 m	90 dB / 120 dB
Usable Range	70 Hz - 20 kHz (-6 dB)
Tuning Frequency Excursion minimum	70 Hz
X - Overpoint acoustical	1,5 kHz
Coverage horizontal / vertical	90° x 60°, rotatable
Enclosure Wedge Angle	20°
Connectors	2 x NLT4MP in/out (optionally NLT4FP) Coding: 1 +/- FR, 2 +/- loop thru
Rigging / Fittings	4 x M10 / 2 x M6
Weight	6,5 kg
Size height x width x depth	40,0 x 17,0 x 26,0 cm
Order No.	00310



The tweeter horn can be rotated by 90° as required.




The front grille is held in place by magnets and is easy to remove.




Versatile M10 mounting points for attaching the various accessories.

DIMENSIONS

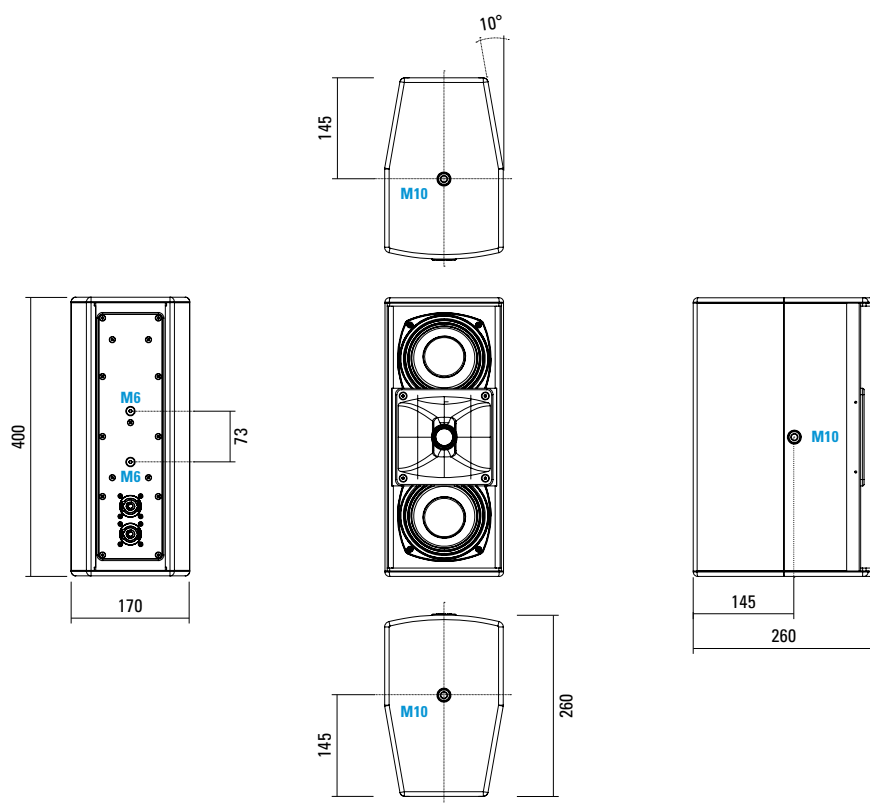


MEASUREMENTS


2D Directivity Plot - horizontal

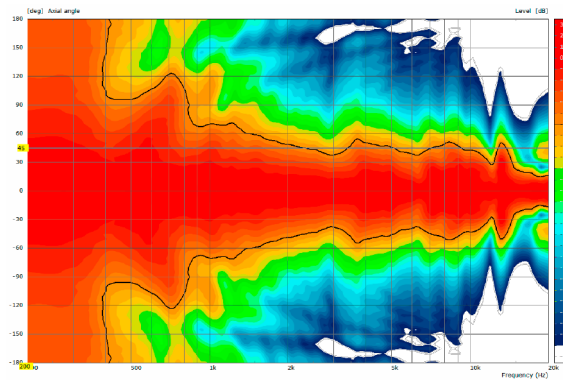

2D Directivity Plot - vertical

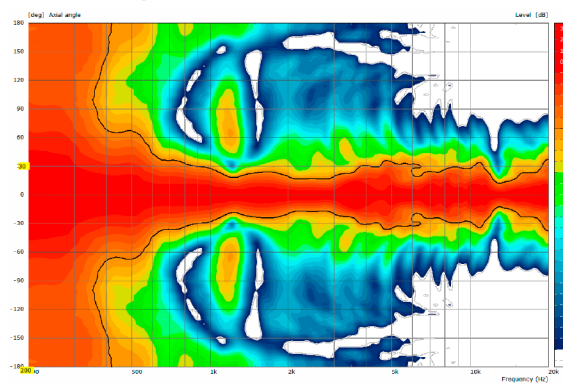

Frequency Response with Preset + Impedance

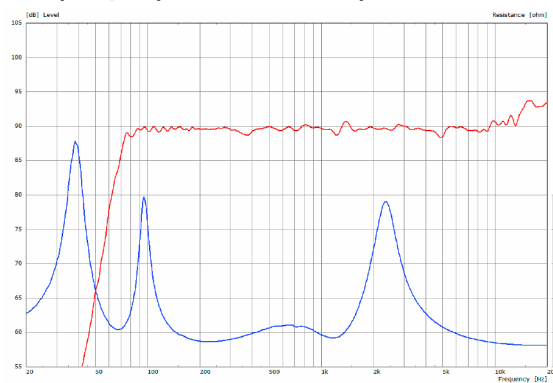



Flying-Bracket

for F 1, horizontal alignment,
(incl. 2 x socket head screws M10 x
20 mm, 2 x washers M10)

Order No. **01207/F1**



Handle Screw

for flying brackets,
adjustable, M10 x 20 mm

Order No. **08375/20**



Pole Mount Adapter

35 mm $\varnothing$ $\rightarrow$ M10 x 16 mm,
star knob screw M8 x 20 mm

Order No. **08126**

35 mm $\varnothing$ $\rightarrow$ M10 x 16 mm

Order No. **08126/II**



Knurled Head Nut

reduction screw for fastening
M10 Pole Mount Adapter (08126)

Order No. **73755**



Flange

with ball and socket joint,
with additional locking screw,
M10 x 15 mm, max. load 15 kg

Order No. **08125**



Quick Trigger Clamp - small

M10, max. load 20 kg

Order No. **01223/20 kg**



Truss Clamp

incl. M10 mini TV spigot,
max. load 15 kg

Order No. **01221**



Steel Safety

4 mm x 600 mm, black,
quick connector undetachably,
max. load 10 kg (BGI 810-3)

Order No. **01376/4**



Ring Screw

M10– DIN 580

Order No. **73700** (zincd)

Order No. **73700/sw** (black zincd)


ACCESSORIES F 1

Wall Mount



ball and socket joint flange (08125)
+ 08125/plate
Order No. **08125/set**

Wall Mount



for permanent installation,
incl. tilt angle stop,
M10, max. load 15 kg
Order No. **08131/F/w** (RAL 9010)
Order No. **08131/F**

Wall Mount



2 x M6 fixing holes (d=73 mm),
1 x M10 fixing hole (center),
max. load 25 kg
Order No. **03034/w** (RAL 9010)
Order No. **03034**

Wall Mount



using fixing points d= 73 mm
Order No. **08132/w** (RAL 9010)
Order No. **08132**

Bag



for 2 x F 1 / 2 x GL 8,
2 x TSM 8 / 2 x X 2, padded,
with pocket for accessories
Order No. **01245**

Flight Case Trunk



for 4 pcs. F 1,
accessory compartment, 10,5 cm wide,
heavy duty, 9 mm birch multiplex,
PVC coated black, 4 x recessed sprung
handles, 1 x butterfly latch medium,
4 x stacking recesses, 4 x 100 mm blue
wheels (2 pcs. with brake), interior
lined with felt, 24 kg
Size: 60 x 53 x 60 cm (W x D x H)
Order No. **16102**

