



The F series speakers are suitable for all applications where highly precise and broadband sound transmission down to low frequencies is required. This makes perfect integration easy and opens up many application possibilities in the field of corporate events, trade fairs and product presentations, press conferences, in conference rooms and lecture halls, in theaters, concert halls and cinemas as well as in sports halls and fitness centers. If the speakers are supported by subwoofers, concert levels are also possible. The arrangement of the components ensures good focusing to optimize speech intelligibility. All models feature newly developed top-class components to achieve the best possible sound quality and defined dispersion characteristics.

PRODUCT SPECIFICATIONS

Speaker Components	2 x 8" Nd (3" VC) / 1" Nd (1,7" VC)
Description	Fullrange Speaker System
Power AES / Peak	800 W / 2400 W
Impedance nominal	4 Ω
SPL 1 W / Peak @ 1 m	94 dB / 128 dB
Usable Range	60 Hz - 20 kHz (-6 dB)
Tuning Frequency Excursion minimum	60 Hz
X - Overpoint acoustical	1,0 kHz
Coverage horizontal / vertical	90° x 60°, rotatable
Enclosure Wedge Angle	20°
Connectors	2 x NLT4MP in/out (optionally NLT4FP) Coding: 1 +/- FR, 2 +/- loop thru
Handles	2 x
Rigging / Fittings	8 x M10 / 2 x M6 35 mm pole mount
Weight	18 kg
Size height x width x depth	60,0 x 25,0 x 36,0 cm
Order No.	00320




The tweeter horn can be rotated by 90° as required.




The front grille is held in place by magnets and is easy to remove.



DIMENSIONS

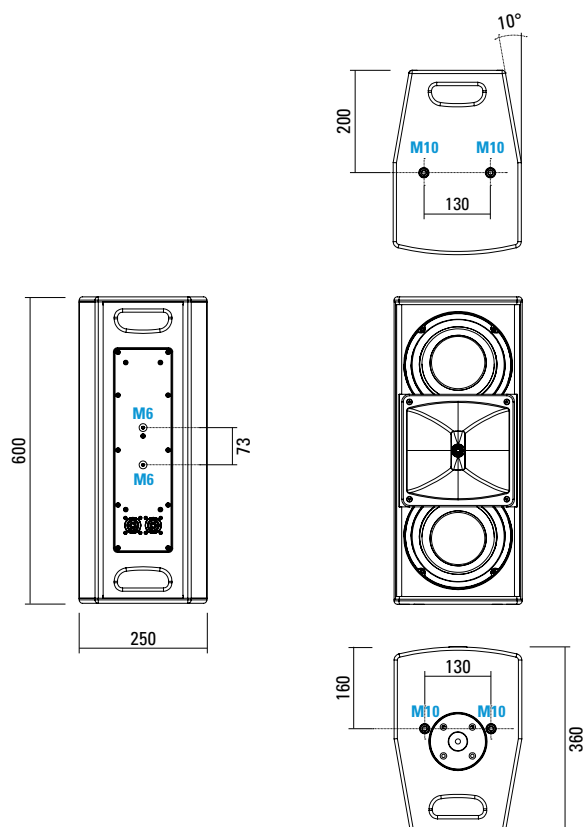


8 x M10 Twinpoints for MultiRigg™

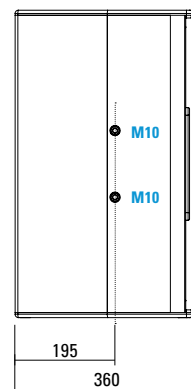


MEASUREMENTS


2D Directivity Plot - horizontal

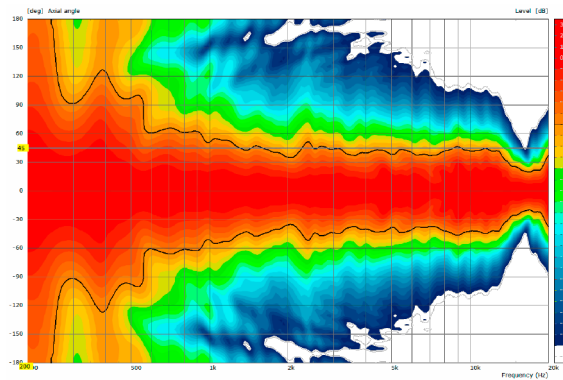


2D Directivity Plot - vertical

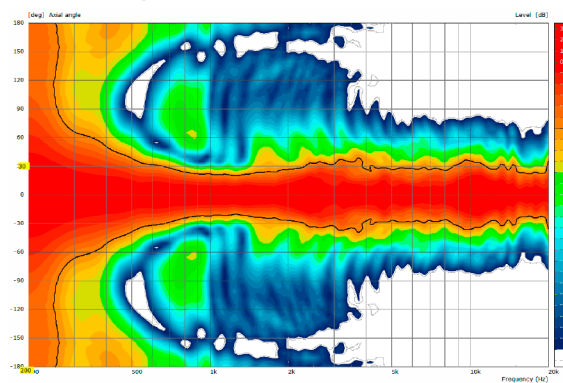

Frequency Response with Preset + Impedance

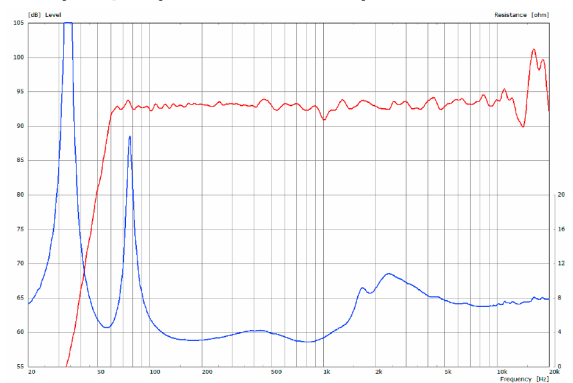

Flying-Bracket



for F 3, horizontal alignment,
(incl. 4 x socket head screws
M10 x 20 mm)

Order No. **01207/F3**

Handle Screw



for flying brackets, adjustable
M10 x 20 mm

Order No. **08375/20**

MultiRigg™



for flown and ground stacked
applications, (incl. 2 x knurled screws
M10 x 20 mm, 1 x handle screw
M8 x 55 mm), max. load 50 kg

Order No. **01360**

MultiRigg™ Light



for fixed installations,
(incl. 2 x socket head screws M10 x
20 mm), max. load 50 kg

Order No. **01362**

MultiRigg™ Basic



(incl. load adapter M10,
2 x knurled screws M10 x 20 mm),
max. load: 50 kg

Order No. **01364**

MultiTilt™



Tilt adapter with adjustable tilt
from 0° to 37,5° (2,5° steps),
integr. pole mount adapter with clam-
ping device, (incl. 2 x knurled screws
M10 x 20 mm), max. load 50 kg

Order No. **01370**

Knurled Screw



M10 x 20 mm

Order No. **73750/w** (RAL 9010)

Order No. **73750**

Pole Mount Adapter



35 mm Ø → M10 x 16 mm,
M8 x 20 star knob screw

Order No. **08126**

35 mm Ø → M10 x 16 mm

Order No. **08126/II**

Knurled Head Nut



reduction screw for fastening
M10 Pole Mount Adapter (08126)

Order No. **73755**

Quick Trigger Clamp - small



M10, max. load 20 kg

Order No. **01223/20 kg**

Quick Trigger Clamp



max. load 100 kg

Order No. **01223/100 kg**

Steel Safety



6 mm x 600 mm, black,
quick connector undetachably,
max. load 22 kg (BGI 810-3)

Order No. **01376/6**

Ring Screw



M10 – DIN 580

Order No. **73700** (zincd)

Order No. **73700/sw** (black zincd)

TV Spigot



M10 internal thread,
28 mm Ø

Order No. **08128**

ACCESSORIES F 3

Wall Mount



bar: 269 mm, max. load 40 kg,
incl. (M10 x 70 mm socket head screw,
M10 hex lock nut and flat washer)

Order No. **08130/F/269/w** (RAL 9010)
Order No. **08130/F/269**

Wall Mount



bar: 400 mm, max. load 40 kg,
incl. (M10 x 70 mm socket head screw,
M10 hex lock nut and flat washer)

Order No. **08130/F400/w** (RAL 9010)
Order No. **08130/F400**

Wall Mount



2 x M6 fixing holes (d=73 mm),
1 x M10 fixing hole (center),
max. load 25 kg

Order No. **03034/w** (RAL 9010)
Order No. **03034**

Wall Mount



using fixing points d= 73 mm

Order No. **08132/w** (RAL 9010)
Order No. **08132**

Bag



for 1 x F 3, with two-way zip,
padded, incl. label pocket

Order No. **01224/F3**

Flight Case Trunk



for 2 pcs. F 3,
accessory compartment, 14 cm wide,
heavy duty, 9 mm birch multiplex,
PVC coated black, 4 x recessed sprung
handles, 2 x butterfly latches medium,
4 x stacking recesses, 4 x 100 mm blue
wheels (2 pcs. with brake), interior
lined with felt, 29 kg

Size: 80,5 x 57 x 58 cm (W x D x H),

Order No. **16115**

